

Honeywell

CT30 XP Series

Universal Dock and Standard Accessories

User Guide

Disclaimer

Honeywell International Inc. (“HII”) reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. HII makes no representation or warranties regarding the information provided in this publication.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material. HII disclaims all responsibility for the selection and use of software and/or hardware to achieve intended results.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

Copyright © 2022 Honeywell Group of Companies. All rights reserved.

Web Address: sps.honeywell.com

Trademarks

Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are the property of their respective owners.

Patents

For patent information, see www.hsmpats.com.

TABLE OF CONTENTS

Customer Support	v
Technical Assistance	v
Product Service and Repair	v
Limited Warranty	v
Chapter 1 - Introduction	1
List of Universal Dock and Booted Accessories	2
Agency Models	2
Chapter 2 - Protective Boot	3
Out of the Box	3
Attach the Protective Boot	3
Remove Protective Boot	4
Chapter 3 - Universal Dock Home Base and Ethernet Home Base	7
Features	7
Out of the Box	8
Connect Power	8
Charge the Battery Pack	9
Remove the Battery Pack	10
Status LED	11
Chapter 4 - Charge Base and Ethernet Base	13
Features	13
Out of the Box	14

Connect Power.....	14
Charge the Battery Pack.....	14

Chapter 5 - Universal Dock 5-Bay Charge Base..... 15

Features.....	16
Out of the Box.....	17
Insert the Battery Charger.....	18
Connect Power.....	19
Charge the Battery Pack.....	19
Status LED.....	19

Chapter 6 - Universal Dock Display Dock..... 21

Features.....	21
Out of the Box.....	22
Dock Connectors.....	22
Connect Power.....	22
Connect to Monitor.....	22
Connect to an Ethernet Network.....	22
Connect to a USB Device.....	23
Status LED.....	23
Check Software on Computer.....	23
Insert Computer into the Dock.....	23
Configure the Display Dock Settings.....	24
Set Display Dock Settings.....	24
Set Monitor Settings.....	24
Set Peripheral Settings.....	25
Set Mode Settings.....	25
Connected Devices.....	25
Monitor Connections.....	25
USB Devices.....	26
Clean the Dock.....	26

Chapter 7 - Quad Battery Charger	27
Features	27
Out of the Box.....	28
Connect Power	28
Charge the Battery.....	28
Status LED	29
Chapter 8 - Universal Dock Cups	31
Out of the Box.....	31
Replacing a Universal Cup	32
Chapter 9 - Scan Handle	35
Features	35
Out of the Box.....	36
Attach Scan Handle.....	36
Scan a Bar Code.....	37
Remove Scan Handle	37
Chapter 10 - Wearable Kit	39
Features	39
Out of the Box.....	40
Replacement Parts.....	40
Assemble Wearable Kit.....	41
Scanning Barcodes	43
Remove Wearable Kit.....	43
Replace Rubber Pad.....	44
Cleaning.....	44
Chapter 11 - Mount a Charging Dock	47
Mount a Charging Dock	47

Customer Support

Technical Assistance

Go to sps.honeywell.com, and then select **Support > Productivity** to find a host of options to help you quickly find the support you need and/or who to contact.

Product Service and Repair

Honeywell International Inc. provides service for all of its products through service centers throughout the world. Go to sps.honeywell.com, and then select **Support** to find a service center near you or to get a Return Material Authorization number (RMA #) before returning a product.

Limited Warranty

For warranty information, go to sps.honeywell.com and select **Support > Warranties**.

INTRODUCTION

Honeywell offers a full range of universal and boot-compatible accessories for the CT30 XP mobile computer, including:

- Protective Boots ([page 3](#))
- Home Bases and Ethernet Bases for one device and one battery ([page 7](#))
- Charge and Ethernet Bases for up to four devices ([page 13](#))
- 5-Bay Charge Bases with an optional battery charger ([page 15](#))
- Display Docks ([page 21](#))
- Quad Battery Chargers ([page 27](#))
- Scan handle ([page 35](#))
- Replacement Cups for Universal Bases ([page 31](#))

Note: *Throughout this manual, all versions of the mobile device are referred to as the computer unless information is specific to a particular model.*



Caution: We recommend the use of Honeywell accessories and power adapters. Use of any non-Honeywell accessories or power adapters may cause damage not covered by the warranty.

Mise en garde : Il est recommandé d'utiliser les périphériques, les cordons d'alimentation et les adaptateurs secteur conçus par Honeywell. L'utilisation de tout périphérique, cordon d'alimentation ou adaptateur secteur d'une autre marque est susceptible de provoquer des dommages non couverts par la garantie.



Caution: Make sure that all components are dry prior to using the computers and batteries with accessories. Using wet components may cause damage not covered by the warranty.

Mise en garde : Assurez-vous que tous les composants sont secs avant de connecter les terminaux/batteries à des périphériques. L'insertion de composants humides risque de provoquer des dommages non couverts par la garantie.

List of Universal Dock and Booted Accessories

Note: For information on CT30 XP RFID Bracket options for your Honeywell RFID reader, refer to the RFID reader user guide. Product documentation is available for download at sps.honeywell.com.

Accessory	Part Number	Use With
Protective Boot	CT30P-PB-XP	CT30 XP
Universal Home Base	CT30P-HB-UVN	CT30 XP without boot
	CT30P-HB-UVB	CT30 XP with boot
Universal Ethernet Home Base	CT30P-EB-UVN	CT30 XP without boot
	CT30P-EB-UVB	CT30 XP with boot
Universal Charge Base	CT30P-CB-UVN	CT30 XP without boot
	CT30P-CB-UVB	CT30 XP with boot
Universal 5-Bay Charger	CT30-5CB-UVN-BAT	CT30 XP with four universal battery cups without boot and battery charger
	CT30-5CB-UVB-BAT	CT30 XP with four universal battery cups with boot and battery charger
	CT30P-5CB-UVN	CT30 XP with five universal battery cups and without boot
	CT30P-5CB-UVB	CT30 XP with five universal battery cups with boot
Universal Ethernet (Net) Base	CT30P-NB-UVN	CT30 XP without boot
	CT30P-NB-UVB	CT30 XP with boot
Universal Display Dock	CT30P-DB-UVN	CT30 XP without boot
	CT30P-DB-UVB	CT30 XP with boot
Universal Cup	CT30P-UCP-N	CT30XP without boot
	CT30P-UCP-B	CT30XP with boot
Scan Handle	CT30P-SH-00	CT30XP without boot
	CT30P-SH-UVB	CT30XP with boot
Quad Battery Charger	CT30P-QBC	CT30P-BTSC battery pack

For a complete list of accessories for your mobile computer and their part numbers see the *Accessory Guide* for your device, available for download at sps.honeywell.com.

Contact your local sales representative for ordering information.

Agency Models

CT30P-HB, CT30P-EB, CT30P-CB, CT30-5CB, CT30P-NB, CT30P-DB

PROTECTIVE BOOT

Honeywell offers the following protective boots for use with a CT30 XP:

- CT30P-PB-XP

Honeywell also offers a series of boot-compatible communication and charge accessories that do not require you to remove the protective boot from the device before use.

To learn more, see [List of Universal Dock and Booted Accessories](#) on page 2.

Out of the Box


Make sure that your shipping box contains the following:

- Protective Boot (CT30P-PB-XP)


If any items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the Protective Boot or if you want to store it while not in use.

Attach the Protective Boot


1. Insert the computer into the bottom of the boot.

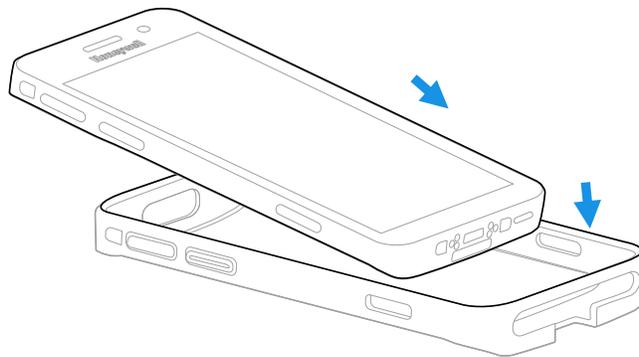

2. Press down evenly.

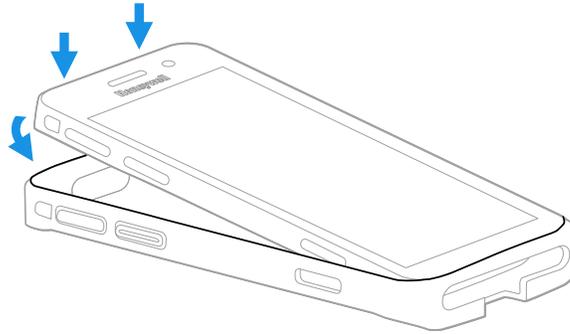

3. Verify that the mobile computer fits securely in the protective boot.

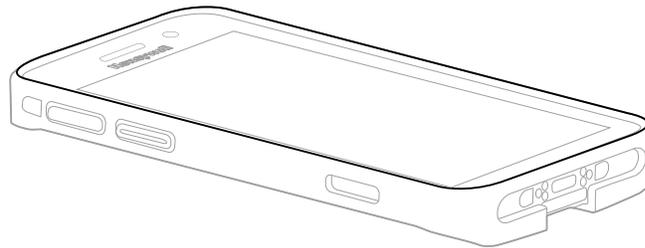


Remove Protective Boot

Note: The protective boot does not need to be removed for battery replacement or charging with a compatible base (see page 2).


Routinely inspect the protective boot for damage, and replace if needed. See [page 2](#) to determine the appropriate replacement boot for your computer.

1. Hold the unit on both sides with the screen facing toward you. Use your thumbs to apply even pressure to the upper lip of the boot.
2. Apply gentle pressure to the back of the unit to release the top of the unit from the boot.

1

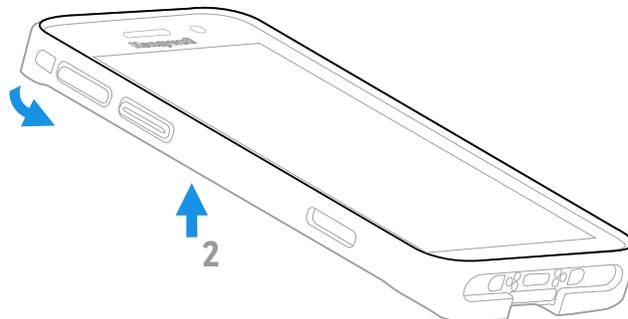

3. Lift the unit up and out of the bottom of the boot.

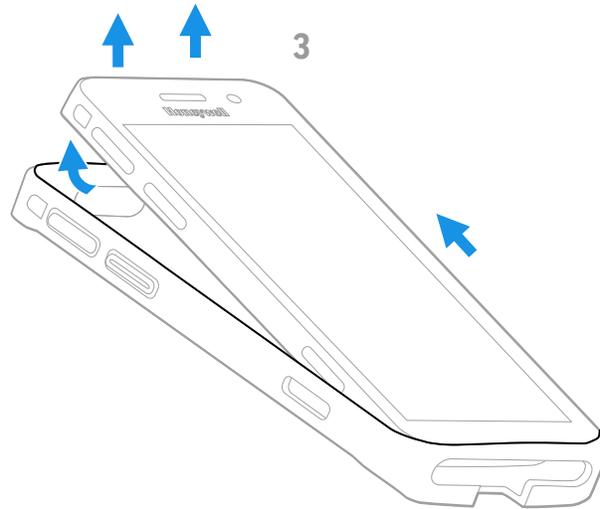


UNIVERSAL DOCK HOME BASE AND ETHERNET HOME BASE


A Home Base is a charge/communication base for one mobile computer and one spare battery. The Home Base has one USB client connector.

An Ethernet Home Base is also a charge/communication base for one mobile computer and one spare battery. However, the Ethernet Base also has an Ethernet connector as well as a USB client connector (Type B).

The CT30P-HB-UVB Universal Dock Home Base and CT30P-EB-UVB Universal Dock Ethernet Base are boot-compatible. The CT30P-HB-UVN Universal Home Base and CT30P-EB-UVN Universal Ethernet Base must be used with a computer without a boot attached. Universal bases have removable cups that can be replaced. (See [Universal Dock Cups](#) on page 31.)

Features

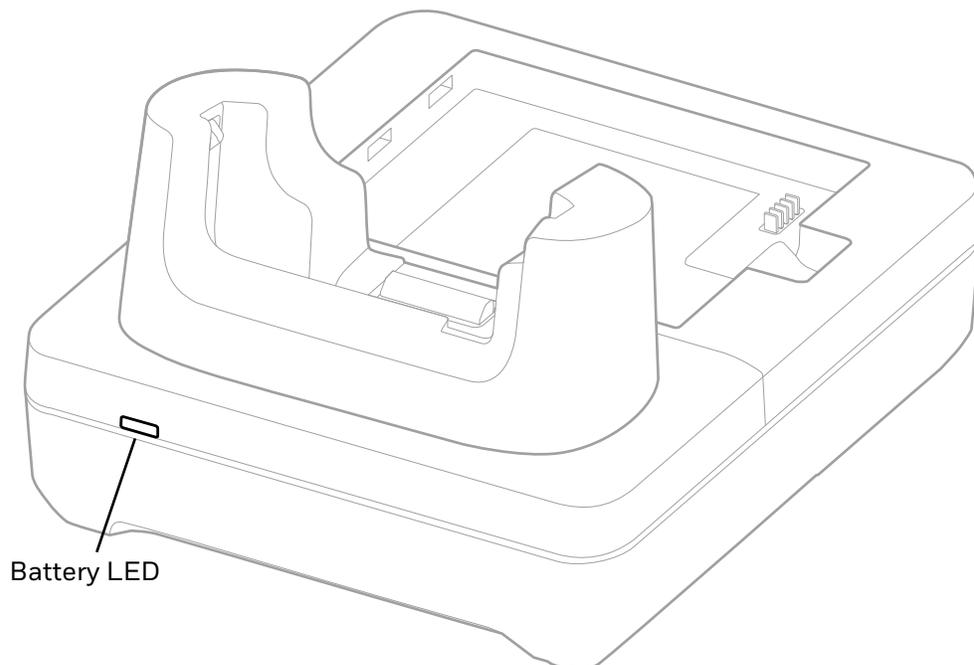

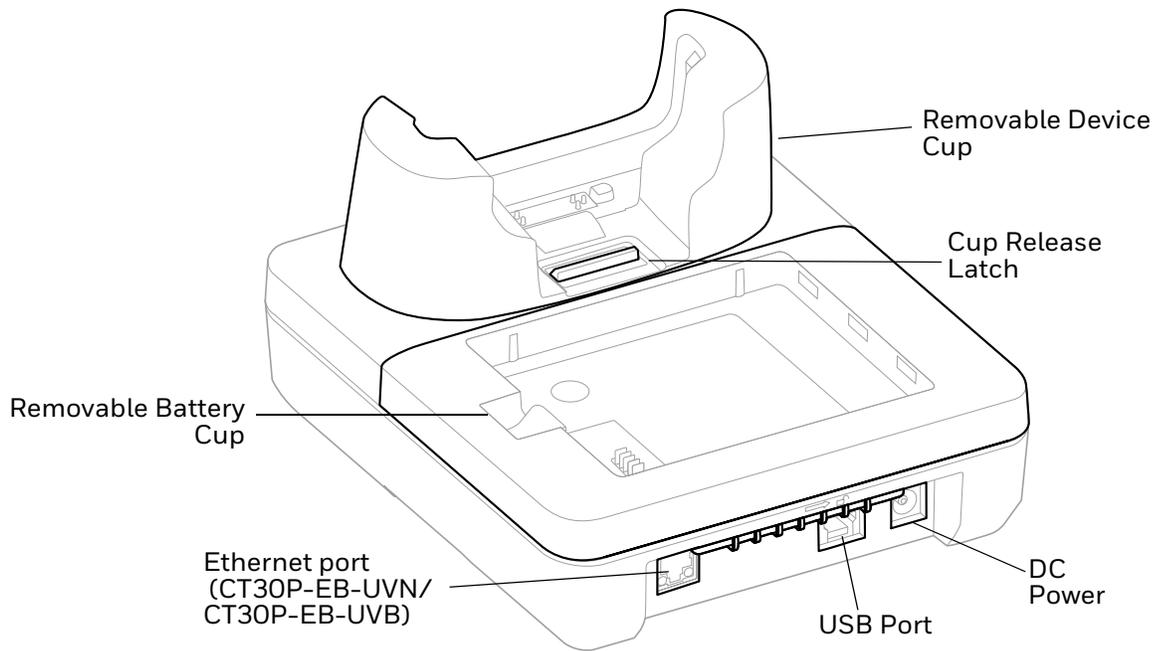

Out of the Box

Make sure that your shipping box contains these items:

- Home Base (CT30P-HB-UVN/CT30P-HB-UVB) or Ethernet Home Base (CT30P-EB-UVN/CT30P-EB-UVB)
- Power supply
- Power cord (if purchased)
- Product documentation

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the base for service or if you want to store the charger while not in use.

Connect Power


Use only a UL Listed power supply that has been qualified by Honeywell with an output rated at 12V/3A. The power supply input rating is 90-264 VAC, 50/60 Hz. The operating temperature is -10 °C to 50 °C (14 °F to 122 °F). The maximum output of the base is 5VDC/2A.

1. Plug the power cord into the power supply.
2. Plug the power supply cable into the power connector on the back of the base.
3. Plug the power cord into a standard wall outlet.


Charge the Battery Pack

Insert computer into Home Base (CT30P-HB-UVN, CT30P-HB-UVB) or Ethernet Home Base (CT30P-EB-UVN, CT30P-EB-UVB). Unit will not charge unless a battery is installed.


CT30P-HB-UVN/CT30P-EB-UVN

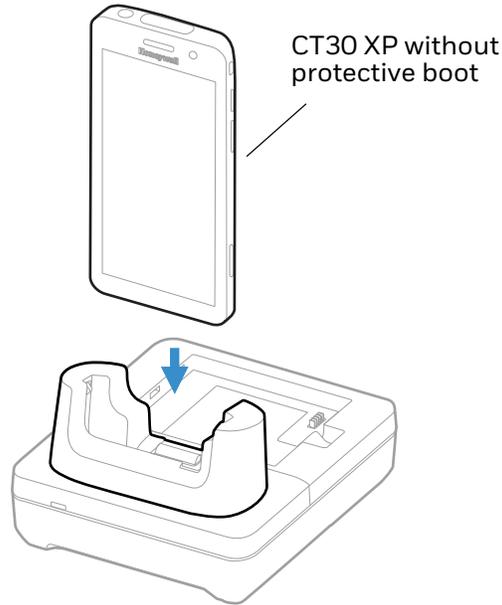


CT30P-HB-UVB/CT30P-EB-UVB

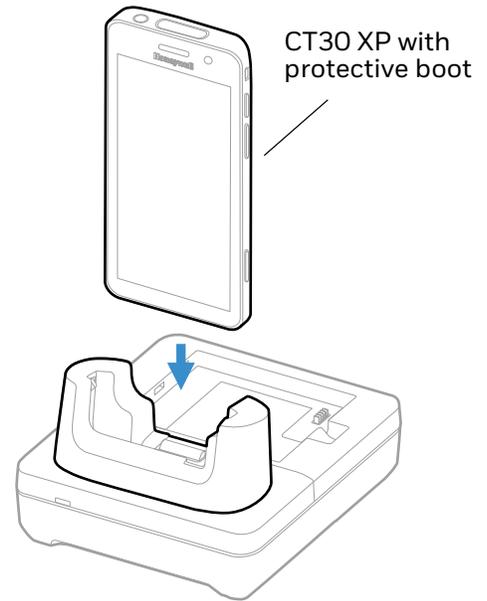



You can also insert a battery pack into the Home Base for charging.

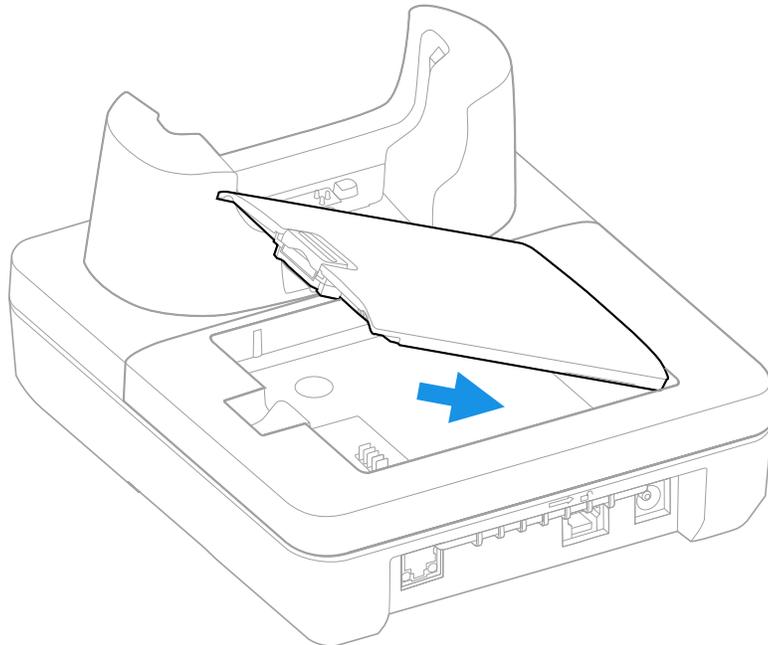

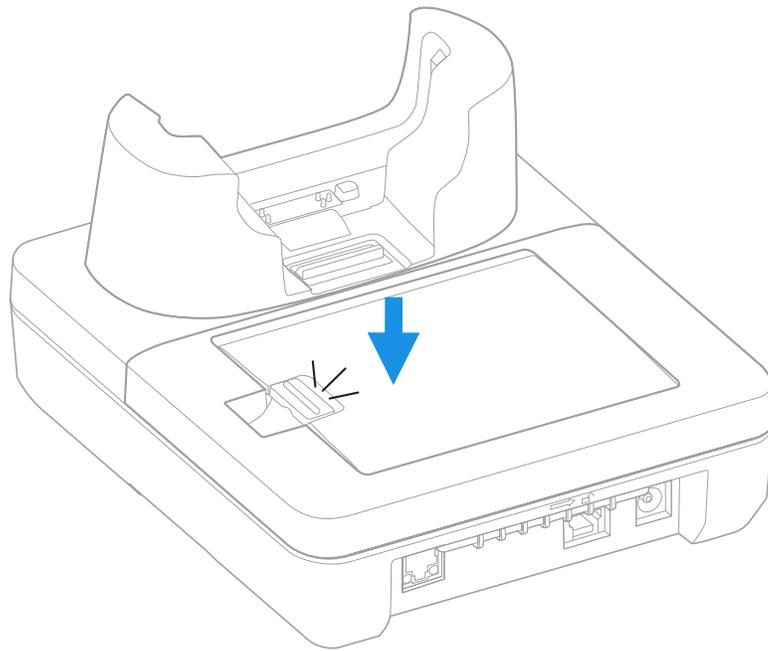

Remove the Battery Pack

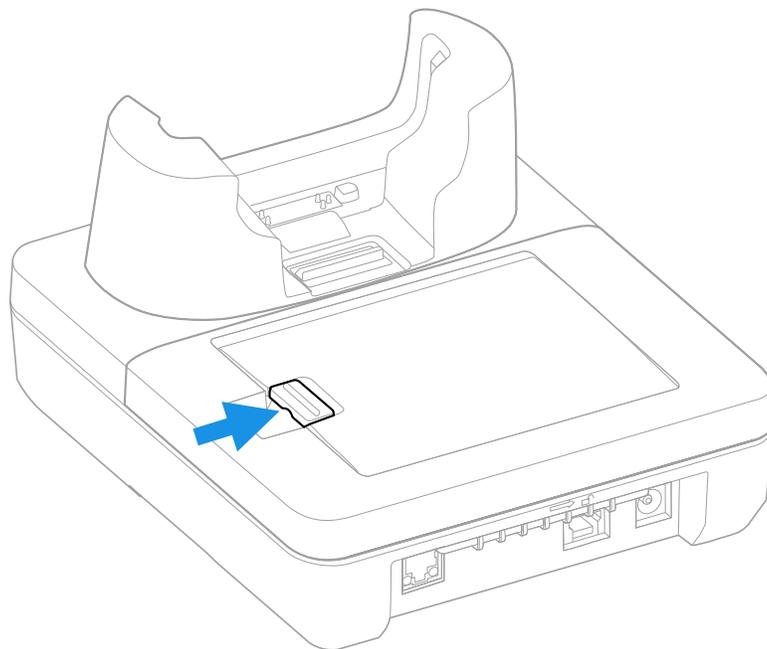

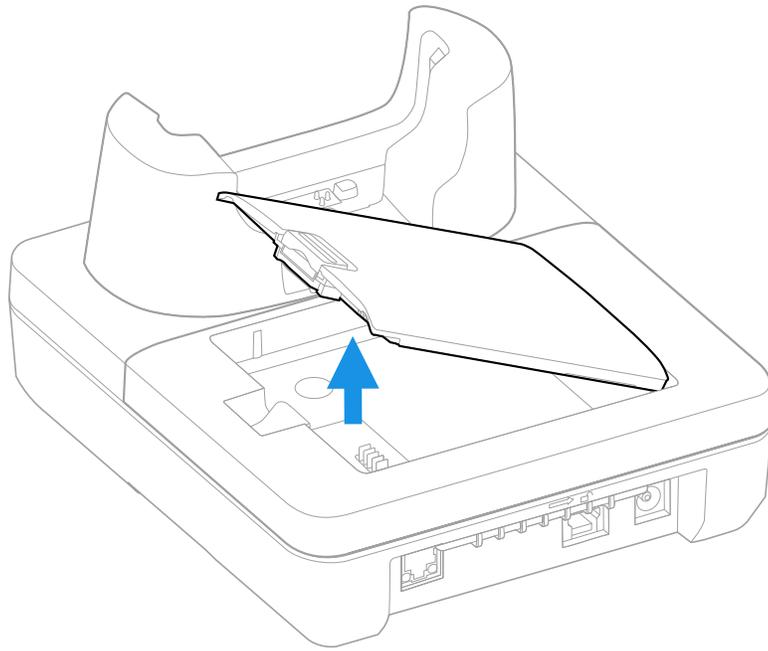

Status LED

LED	Status	Description
Battery	Solid Green	The battery is connected to external power and is fully charged.
	Solid Amber	The battery is connected to external power and is charging.
	Flashing Red	There is a battery charging fault, such as over-temperature.

CHARGE BASE AND ETHERNET BASE


Universal Dock Charge Bases CT30P-CB-UVN and CT30P-CB-UVB charge up to four mobile computers. Model CT30P-CB-UVB is boot compatible.

Ethernet (Net) Bases CT30P-NB-UVN and CT30P-NB-UVB hold four mobile computers and function as both charge and communication bases, with two RJ45 Ethernet ports. Model CT30P-NB-UVB is boot compatible.

Universal bases CT30P-CB-UVN, CT30P-CB-UVB, CT30P-NB-UVN, and CT30P-NB-UVB have removable cups that can be replaced. (See [Universal Dock Cups](#) on page 31.)

Features

CT30P-CB-UVN/CT30P-CB-UVB/CT30P-NB-UVN/CT30P-NB-UVB

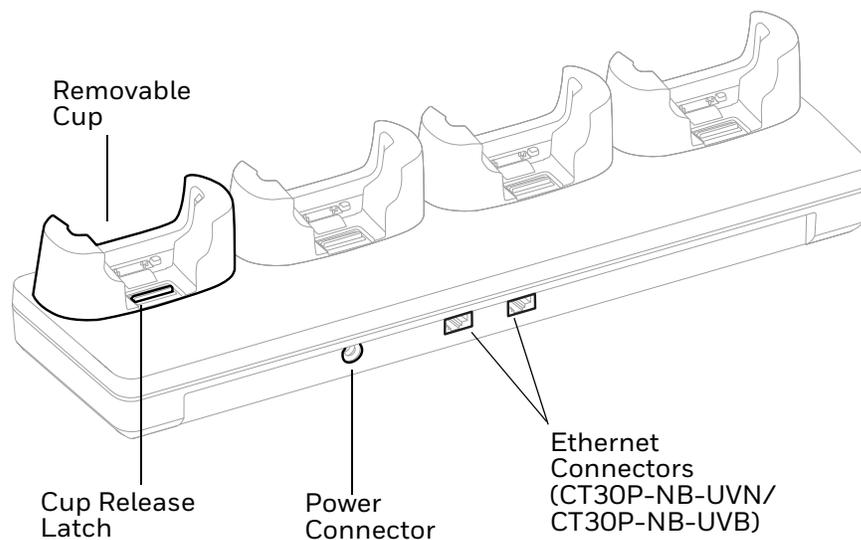

Out of the Box

Make sure that your shipping box contains these items:

- Charge Base (CT30P-CB-UVN, CT30P-CB-UVB) or Ethernet Base (CT30P-EB-UVN, CT30P-NB-UVB)
- Power supply
- Power cord (if purchased)
- Product documentation

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the base for service or if you want to store the charger while not in use.

Connect Power


Use only a UL Listed power supply that has been qualified by Honeywell with an output rated at 12V/7A. The power supply input rating is 100-240 VAC, 50/60 Hz. The operating temperature is -10 °C to 50 °C (14 °F to 122 °F).

1. Plug the power cord into the power supply.
2. Plug the power supply cable into the power connector on the back of the base.
3. Plug the power cord into a standard wall outlet.

Charge the Battery Pack

Insert device with battery installed into the Charge Base or Net Base.

CT30P-CB-UVN/CT30P-NB-UVN

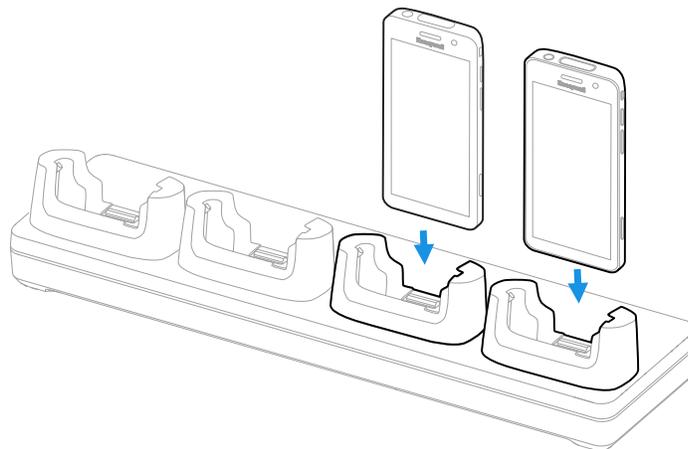

UNIVERSAL DOCK 5-BAY CHARGE BASE

The Universal Dock Five-Bay Charge Base provides the flexibility of charging five units, or four units and four batteries with the battery charger.


Honeywell offers the following 5-bay chargers for the CT30 XP mobile computer:

- CT30-5CB-UVN with one battery charger and four universal cups for use with a CT30 XP without a protective boot
- CT30-5CB-UVB with one battery charger and four universal cups for use with a CT30 XP with a protective boot
- CT30P-5CB-UVN with five universal cups for use with a CT30 XP without a protective boot
- CT30P-5CB-UVB with five universal cups for use with a CT30 XP with a protective boot


Universal bases have removable cups that can be replaced. (See [Universal Dock Cups](#) on page 31.)


Features

CT30-5CB-UVN/CT30-5CB-UVB with Battery Charger

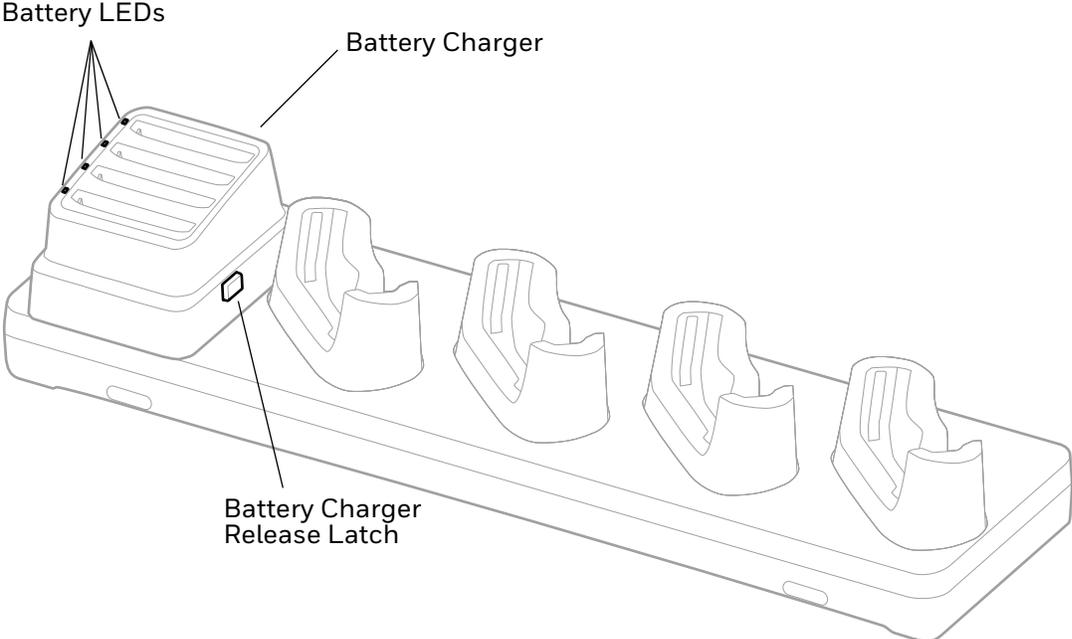

CT30P-5CB-UVN/CT30P-5CB-UVB with Five Universal Cups

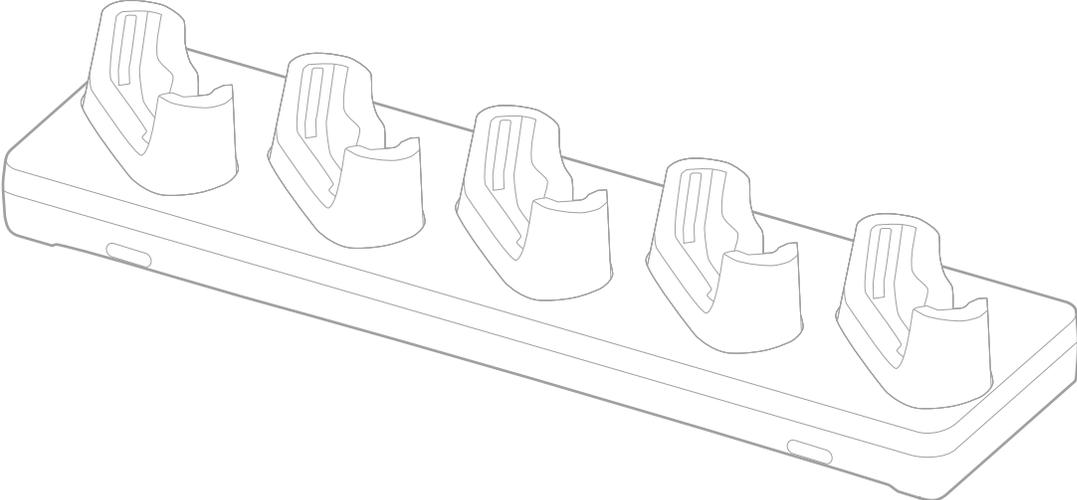

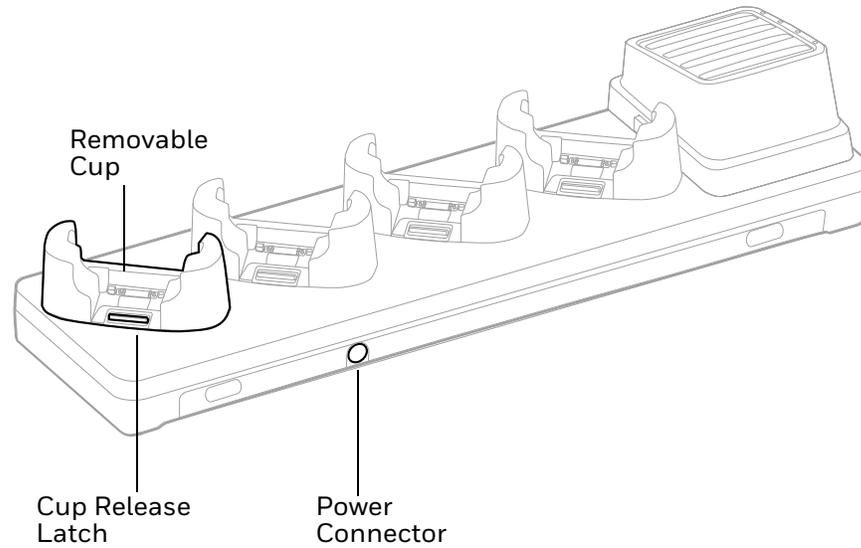

Out of the Box

Make sure that your shipping box contains these items:


- 5-Bay Charge Base (CT30P-5CB-UVN/CT30P-5CB-UVB)
- Power supply
- Power cord (if purchased)
- Product documentation

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the base for service or if you want to store the charger while not in use.


Insert the Battery Charger

Note: The Battery Charger must be installed in the location shown below.

1. Insert the battery charger tilted slightly to the left of the base.

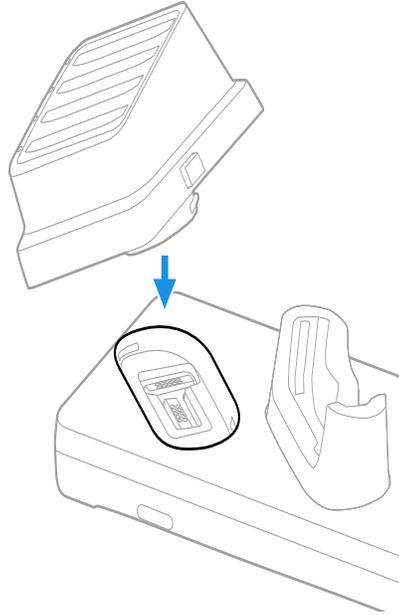

2. Press the latch release button as you push the battery charger down until it snaps in.

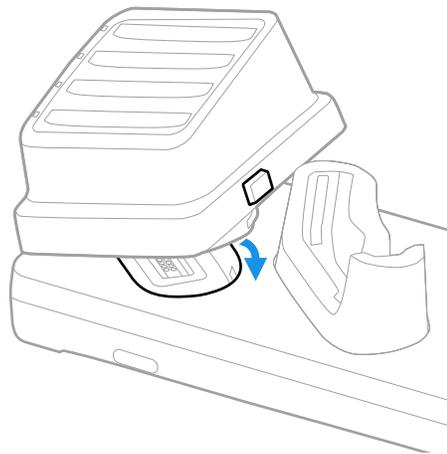


Connect Power

Use only a UL Listed power supply that has been qualified by Honeywell with an output rated at 12V/8.3A. The power supply input rating is 100-240 VAC, 50/60 Hz. The operating temperature is 0 °C to 45 °C (32 °F to 113 °F).

1. Plug the power cord into the power supply.
2. Plug the power supply cable into the power connector on the back of the base.
3. Plug the power cord into a standard wall outlet.

Charge the Battery Pack

Insert device with battery installed into the 5-Bay Charge Base. Or insert battery into the optional battery charger.

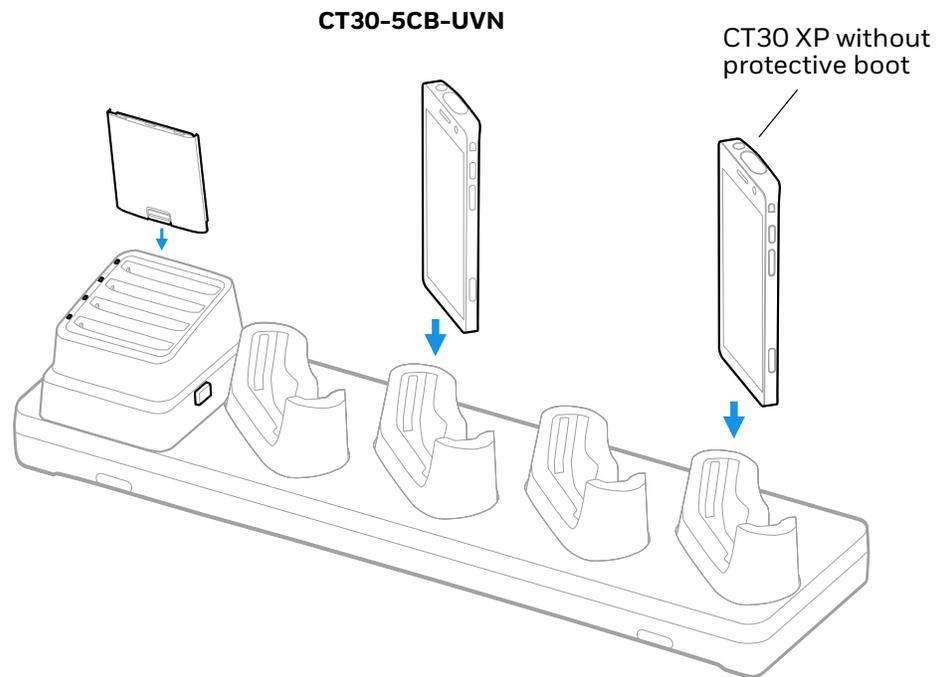

Status LED


LED	Status	Description
Battery	Solid Green	The battery is connected to external power and is fully charged.
	Solid Amber	The battery is connected to external power and is charging.
	Flashing Red	There is a battery charging fault, such as over-temperature.

UNIVERSAL DOCK DISPLAY DOCK

A display dock allows a CT30 XP to become a personal computer. A monitor, keyboard, mouse, and audio can be connected through the dock via the USB ports. The dock also provides an Ethernet connection.

The CT30P-DB-UVN accepts only a computer without a protective boot, while the CT30P-DB-UVB is compatible with a booted computer. Both universal display docks have removable cups that can be replaced. (See [Universal Dock Cups](#) on page 31.)

Features

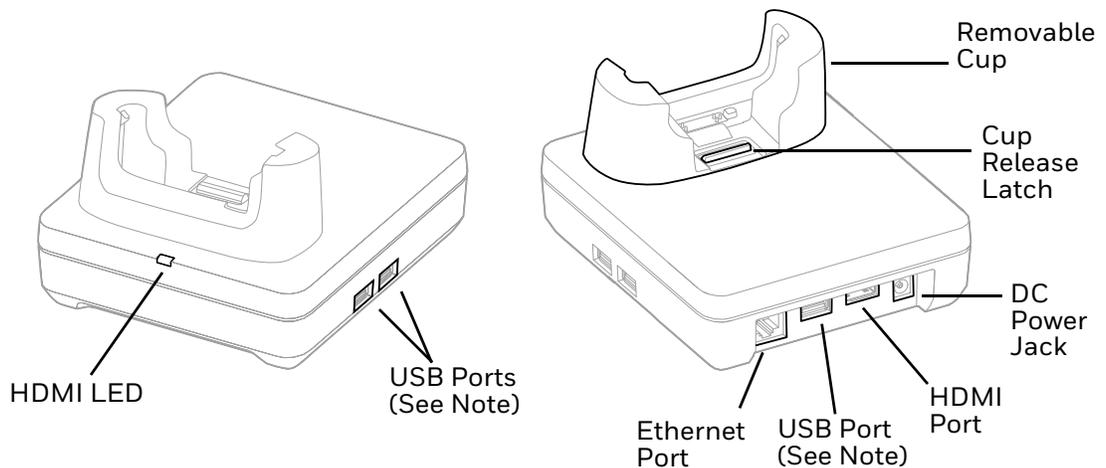

Note: The display dock supports USB direct connections only. The dock does not support USB hub connections, including keyboards with USB port(s).

Out of the Box

Make sure that your shipping box contains these items:

- CT30 XP Universal Display Dock (CT30P-DB-UVN or CT30P-DB-UVB)
- Power adapter
- Power cord
- Regulatory Sheet

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the base for service or if you want to store the charger while not in use.

Dock Connectors

Connect Power

Use only a UL Listed power supply that has been qualified by Honeywell with an output rated at 12 VDC and 3 A. The power supply input rating is 100-240 VAC, 50/60 Hz. The operating temperature is -10°C to 50°C (14°F to 122°F). The maximum output of the base is 5VDC/2A.

1. Plug the power cord into the power supply.
2. Plug the power supply cable into the power jack on the back of the dock.
3. Plug the power cord into a standard wall outlet.

Connect to Monitor

Note: See [Monitor Connections](#) on page 25 for a list of approved connections.

1. Plug the HDMI cable into the dock.
2. Plug the other end of the HDMI cable into the monitor.

Connect to an Ethernet Network

1. Plug the Ethernet cable into the dock.
2. Place the computer in the dock.

Note: For advanced Ethernet settings, go to sps.honeywell.com for the CT30 XP User Guide.

Connect to a USB Device

Note: See [USB Devices](#) on page 26 for a list of approved USB devices.

Note: The dock supports USB direct connections only. The dock does not support USB hub connections, including keyboards with USB port(s).

Plug the USB type A cable into a USB port on the dock.

Status LED


Status	Description
Constant Green	The dock is connected through HDMI.
Off	The dock is not connected or lost connection through HDMI.

Check Software on Computer

Computers powered by Android 8 or higher have the DisplayLink software installed by Honeywell.

Insert Computer into the Dock

Ensure the CT30 XP is fully seated into the dock.

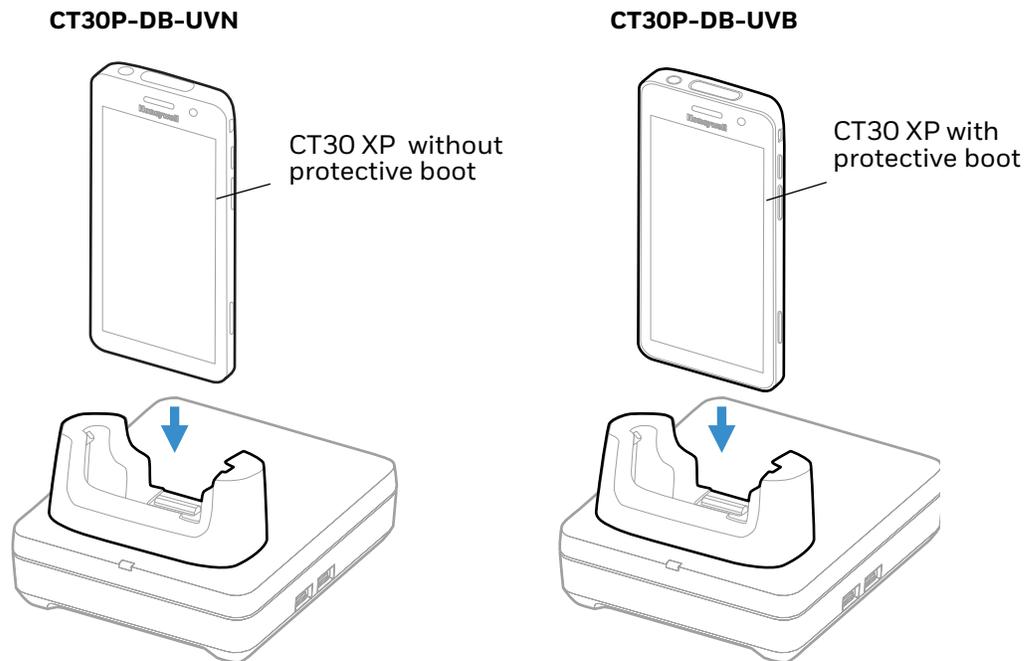

The first time you insert the computer into the dock, prompts appear on the screen. Follow the prompts on the screen to:

- Set default for DisplayLink Presenter to open when the USB device is connected.
- Start capturing everything that is displayed on your screen.

Note: *These prompts no longer appear when you insert the CT30 XP into the dock unless you left “Don’t show again” unchecked.*

The computer will automatically change to landscape and the resolution will update to the monitor settings.

Configure the Display Dock Settings

You can configure the parameters on the computer for the Display Dock using the Display Dock Settings app.

Set Display Dock Settings

The Display Dock Settings app is available from the all apps menu under Settings.

1. Swipe up from the bottom of the Home screen to access all apps.
2. Tap **Settings** > **Honeywell Settings** > **Display Dock**.

Set Monitor Settings

1. Swipe up from the bottom of the Home screen to access all apps.
2. Tap **Settings** > **Honeywell Settings** > **Display Dock**.
3. Choose one of the following options to set the view:
 - Tap **System portrait screen**, to have the computer stay in portrait view.
 - Tap **System landscape screen**, to have the computer stay in landscape view.
4. To set the system resolution, tap **Resolution** and choose one of the available options.
5. To set the density, tap **Density** and choose one of the following options:
 - **160**
 - **240**
 - **320**
 - **400**
 - **480**

Set Peripheral Settings

1. Swipe up from the bottom of the Home screen to access all apps.
2. Tap **Settings** > **Honeywell Settings** > **Display Dock**.
3. To set the right mouse button to the back key, tap **Right mouse button** to toggle the feature on or off.
4. Tap **HDMI audio** to toggle between **Sound to terminal** or **Sound to external monitor**.

Set Mode Settings

1. Swipe up from the bottom of the Home screen to access all apps.
2. Tap **Settings** > **Honeywell Settings** > **Display Dock**.
3. To set the external monitor mode:
 - Select **Primary Mode** to automatically adjust as configured in settings or
 - Select **Mirror mode** to match the terminal's settings.

Connected Devices

Monitor Connections

Supported Devices

- HDMI versions 1.4 and above
- VGA - supported through HDMI/VGA converter
- DVI - supported through HDMI/DVI converter

Non-Supported Devices

- HDMI splitter for two monitors
- Display Port

USB Devices

Supported Devices

- Standard three button mouse with scroll
- Standard QWERTY keyboard without HUB/USB type A ports on the keyboard
- USB headset/USB to 3.5mm audio converter
- USB mass storage devices (thumb drives), not recommended for large transfers (over 1GB)

Non-Supported Devices

- USB Hubs
- USB devices with additional USB type A ports


Clean the Dock

You may need to clean the dock to keep the dock in good working order. Clean the dock as often as needed for the environment in which you are using the dock with a dry soft cloth.

QUAD BATTERY CHARGER

The Quad Battery Charger allows for charging up to four CT30 XP batteries. The CT30P-QBC Quad Battery Charger uses the CT30P-QBC-UCP Battery Universal Dock Cup, which can be replaced and is also compatible with the [Universal Dock 5-Bay Charge Base](#).

Features

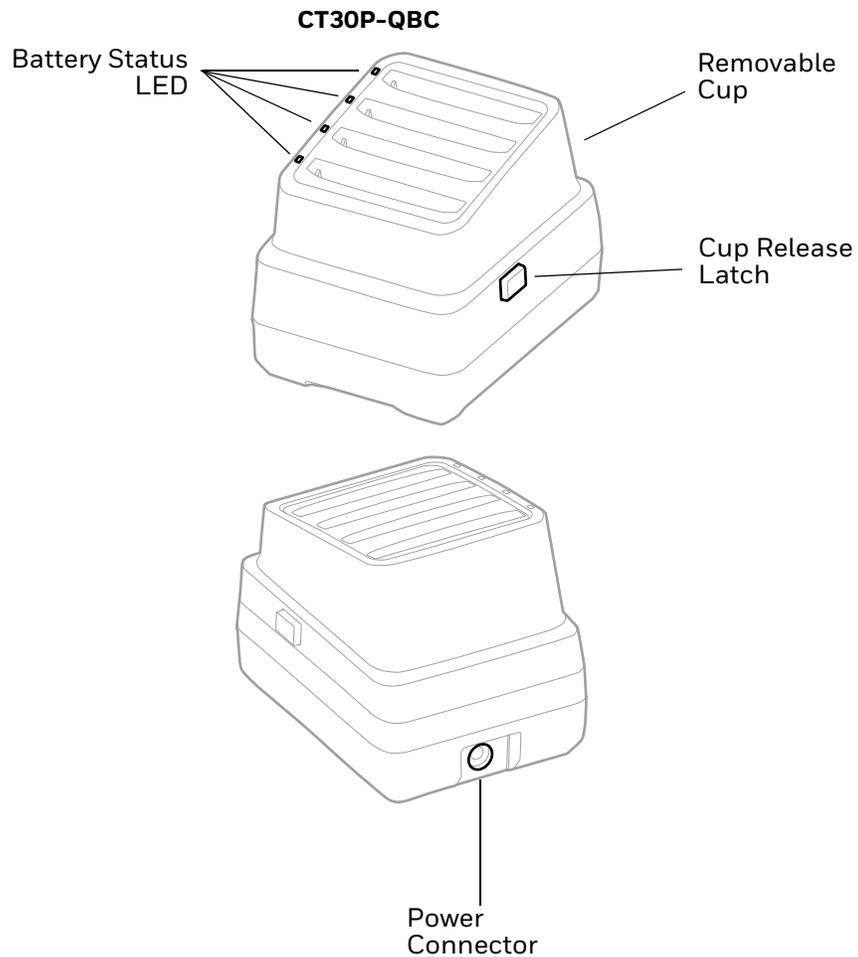

Out of the Box

Make sure that your shipping box contains these items:

- Quad Battery Charger (CT30P-QBC)
- Power supply
- Power cord (model dependent)
- Product documentation

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the charger for service or if you want to store it while not in use.


Connect Power

Use only a UL Listed power supply that has been qualified by Honeywell with an output rated at 12V/3A. The power supply input rating is 100-240 VAC, 50/60 Hz. The operating temperature is 0 °C to 45 °C (32 °F to 113 °F).

1. Plug the power cord into the power supply.
2. Plug the power supply cable into the power connector on the back of the base.
3. Plug the power cord into a standard wall outlet.

Charge the Battery

Insert one to four battery packs into the charger.

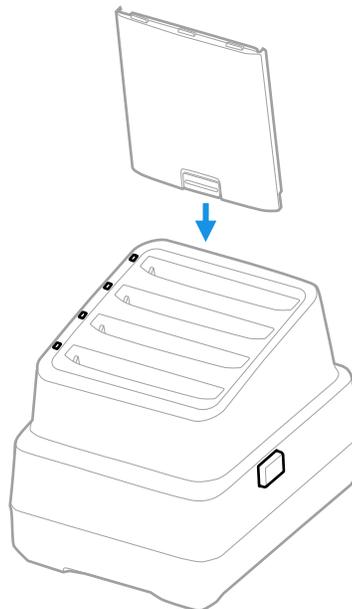

Status LED

LED	Status	Description
Battery	Solid Green	The battery is connected to external power and is fully charged.
	Solid Amber	The battery is connected to external power and is charging.
	Flashing Red	There is a battery charging fault, such as over-temperature.

UNIVERSAL DOCK CUPS

Universal Bases have removable cups that can be replaced with Universal Cups CT30P-UCP-N and CT30P-UCP-B.

CT30P-UCP-N is for use with a CT30 XP computer without a boot. CT30P-UCP-B must be used with a CT30 XP computer with a boot attached.

For more information about the universal docks for CT30 XP computers, see:

- [Universal Dock Home Base and Ethernet Home Base](#) (page 7)
- [Charge Base and Ethernet Base](#) (page 13)
- [Universal Dock 5-Bay Charge Base](#) (page 15)
- [Universal Dock Display Dock](#) (page 21)

Out of the Box

Make sure that your shipping box contains these items:


- Universal Cup (CT30P-UCP-N or CT30P-UCP-B)

If any of these items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the cup or if you want to store it while not in use.


Replacing a Universal Cup

Note: The Universal Charge base is shown in the instructions below for illustration purposes. The steps for removing and inserting a cup are the same for all universal bases.


1. Push the latch towards the front of the base.

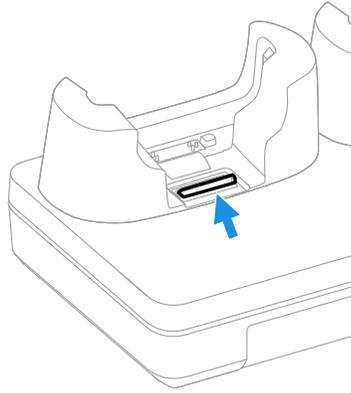


2. Tilt the back of the cup upwards.

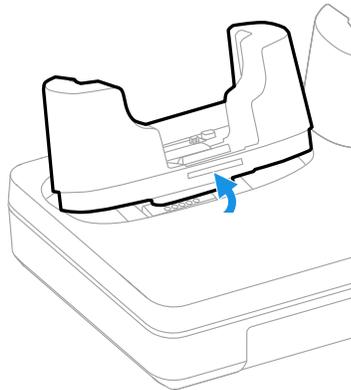


3. Lift the old cup out of the base.

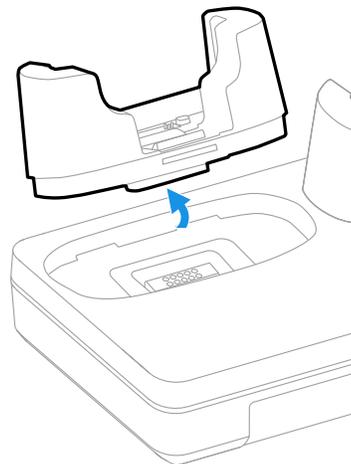

4. Insert the new cup tilted slightly towards the front of the base.

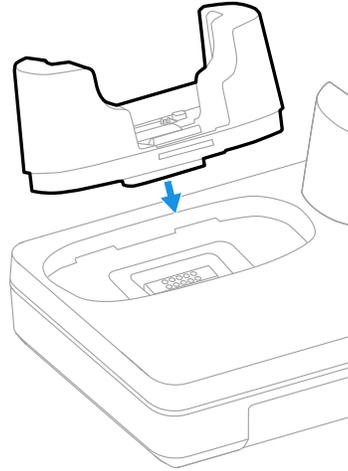

5. Push the cup into the base until it snaps in.

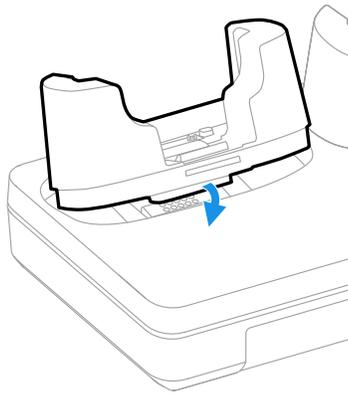


SCAN HANDLE

A scan handle attaches to the mobile computer to provide a handle grip and pull-trigger for barcode scanning. Honeywell offers the following scan handles for the CT30 XP mobile computer:

- CT30P-SH-00 for use with a CT30 XP without a boot attached
- CT30P-SH-UVB for use with a CT30 XP with a boot attached

Features

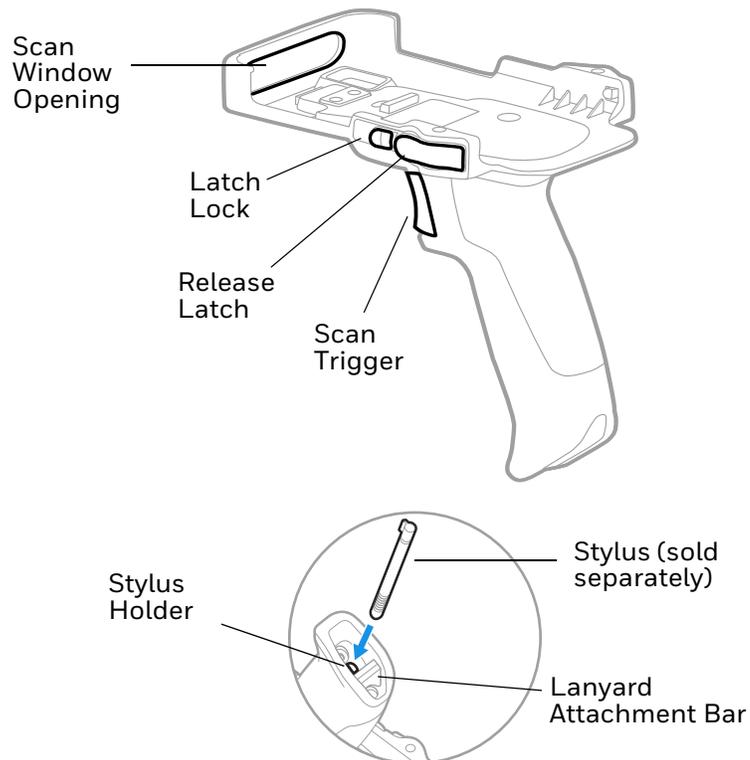

Out of the Box


Make sure that your shipping box contains the following:

- Scan Handle (CT30P-SH-00 or CT30P-SH-UVB)
- Lanyard

If any items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the scan handle for service or if you want to store the scan handle while not in use.

Attach Scan Handle


1. If you are using model CT30P-SH-UVB, insert the CT30 XP mobile computer into the protective boot.
2. Insert the top of the CT30 XP into the handle at a slight angle.
3. Push the unit down until the latch engages.
4. Slide the latch lock to the right.

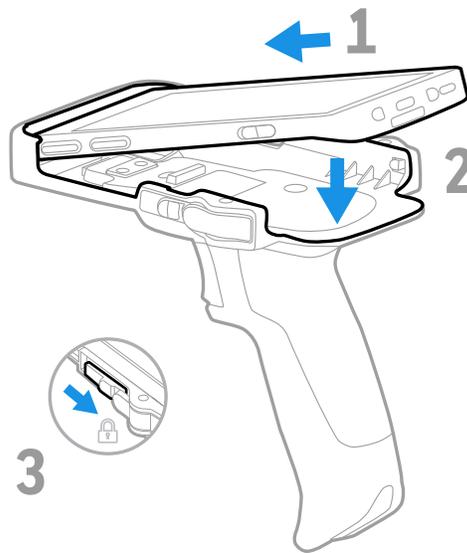

Note: Remove hand strap before assembly.


Scan a Bar Code

Press the trigger on the handle to scan a bar code.

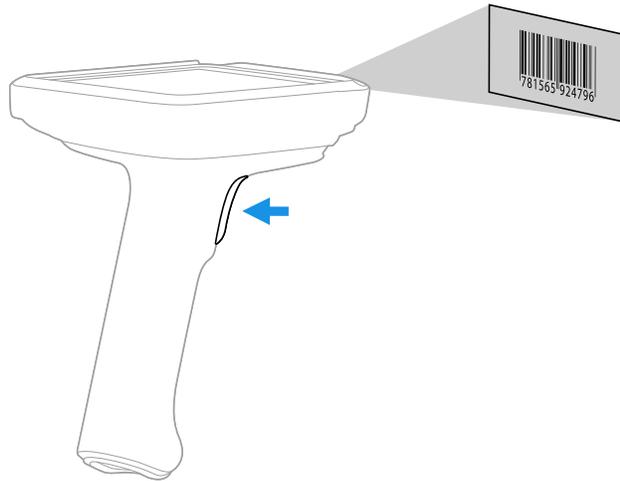


Remove Scan Handle

1. Slide the latch lock to the left.
2. Press the release latch button on both sides.

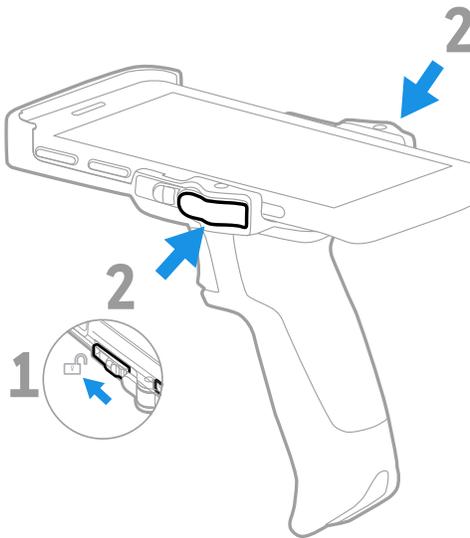

3. Lift unit out.

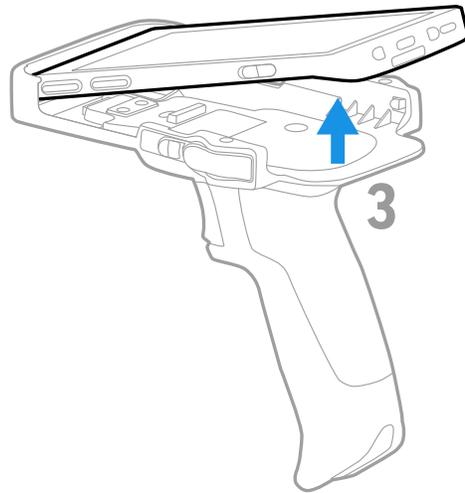

CHAPTER
10

WEARABLE KIT

The CT30 XP Wearable Kit allows the user to mount a CT30 XP mobile computer without a protective boot on either arm. It consists of an arm mount sled and an armband. The sled includes a replaceable rubber pad that helps keep the wearable kit in place.


Honeywell offers the following wearable kit for the CT30 XP mobile computer:

- CT30P-WS-KIT for use with a CT30 XP without a boot attached


The mobile computer can be charged in any CT30 XP charge base with a non-booted Universal Dock cup without removing it from the Wearable Kit.

Features

Orientation for Wearing on Right Arm

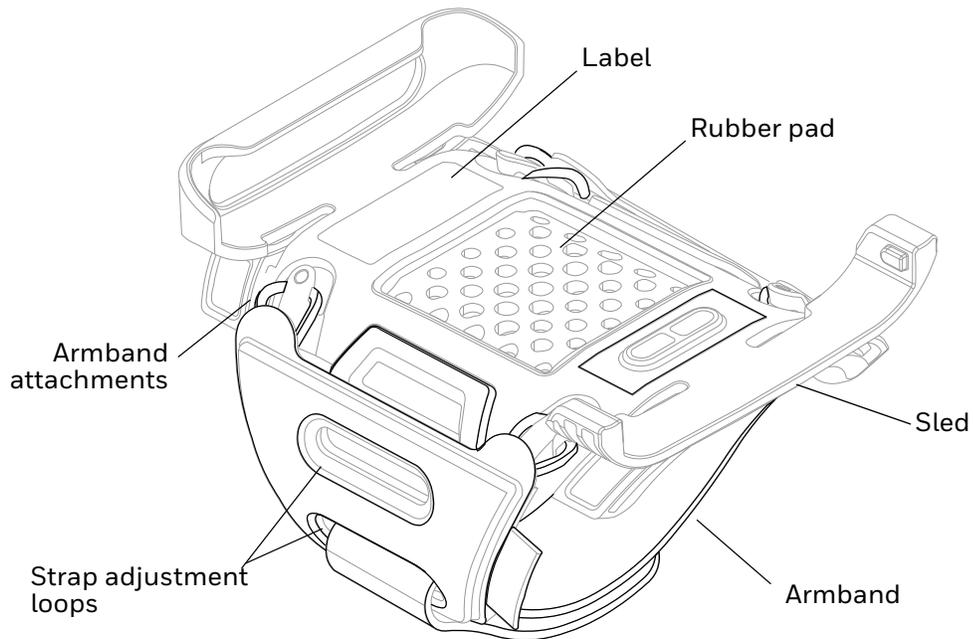

Orientation for Wearing on Left Arm

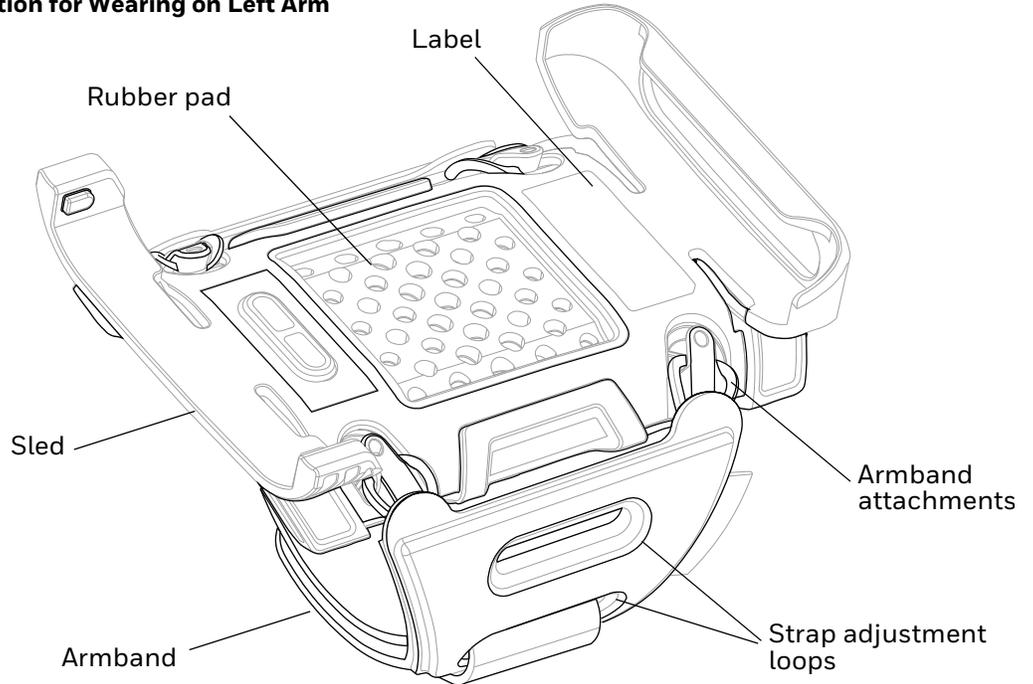

Out of the Box

Make sure that your shipping box contains the following:

- Wearable Kit (CT30P-WS-KIT) including sled, rubber pad, and armband

If any items are missing or appear damaged, contact your Customer Account Representative. Keep the original packaging in the event that you need to return the Wearable Kit or store it when not in use.

Replacement Parts

The wearable kit consists of three parts, the sled, rubber pad, and armband, which can be replaced if they become worn or damaged. Use the following part numbers to order replacement parts.

Part	Part Number
Sled	CT30P-WS-KIT-03
Rubber pad	CT30P-WS-KIT-02
Armband	CT30P-WS-KIT-01


Note: When you order a Wearable Kit, the label on the sled will have the part number for the kit (CT30P-WS-KIT). When you order a replacement sled, the label will have the sled part number (CT30P-WS-KIT-03).

Assemble Wearable Kit


The Wearable Kit is shipped fully assembled with the strap in place to be worn on the right arm. The kit can be worn on either the right or left arm depending on the user's preference.

Note: Remove hand strap from CT30 XP mobile computer before assembly.


1. Attach the hooks from the armband to the attachment clips on the sled. The following illustration shows the armband attached for wearing on the right arm. To change arms, simply remove the armband and reverse the way it is oriented.

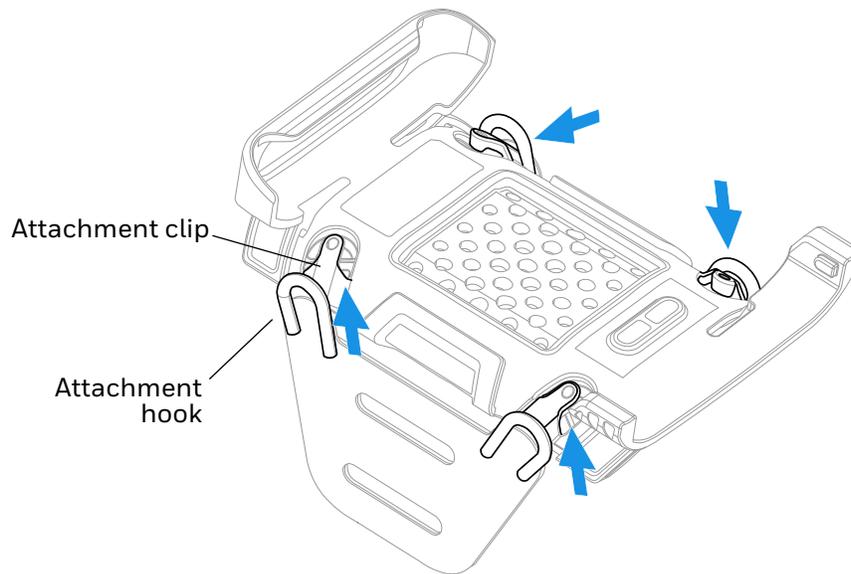


2. Place the sled on top of your arm.
3. Pull the end of the strap through the adjustment loop. You can adjust the length of the strap by using the top or bottom loop.
4. Tighten the strap around the arm so that the sled is held firmly in place in a comfortable position.
5. Fold the strap over and secure with the hook-and-loop tape.

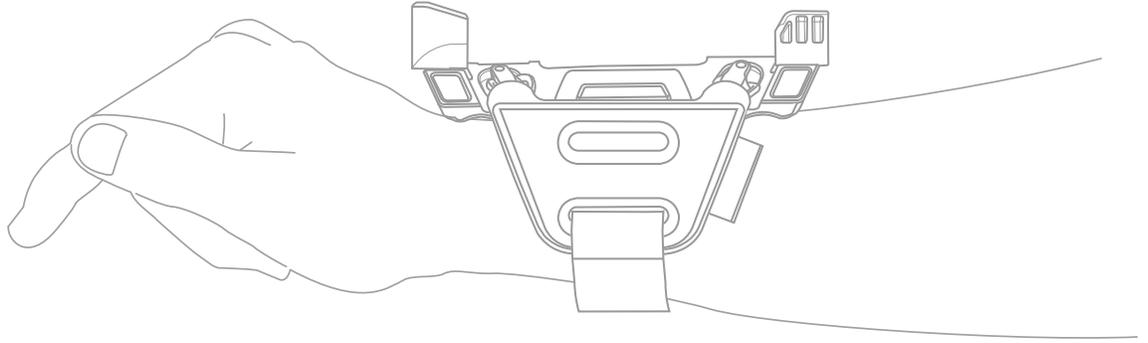

6. Insert the top of the CT30 XP into the sled then push the bottom down until it clicks into place.

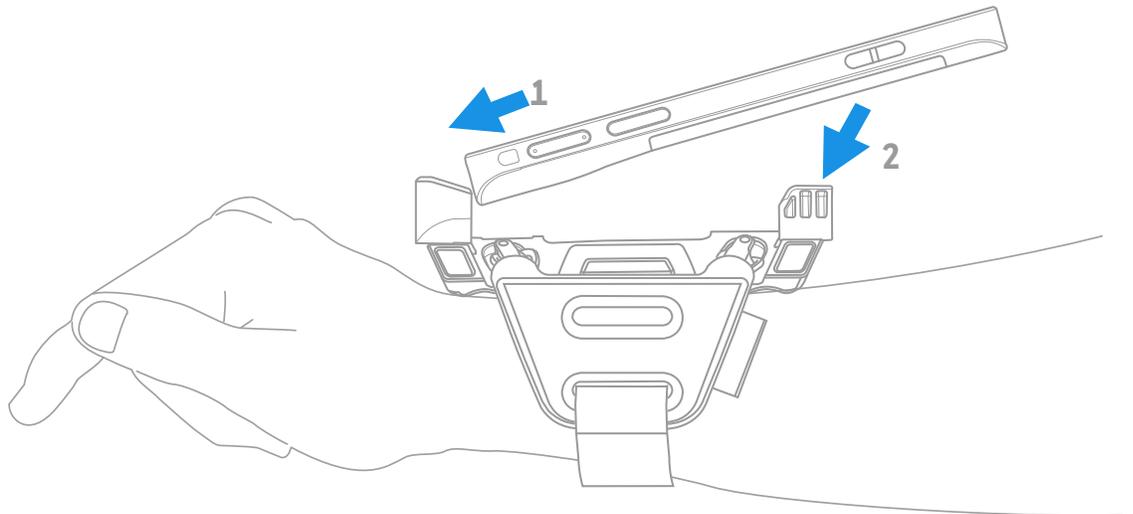

7. Verify that the CT30 XP is firmly seated in the sled.

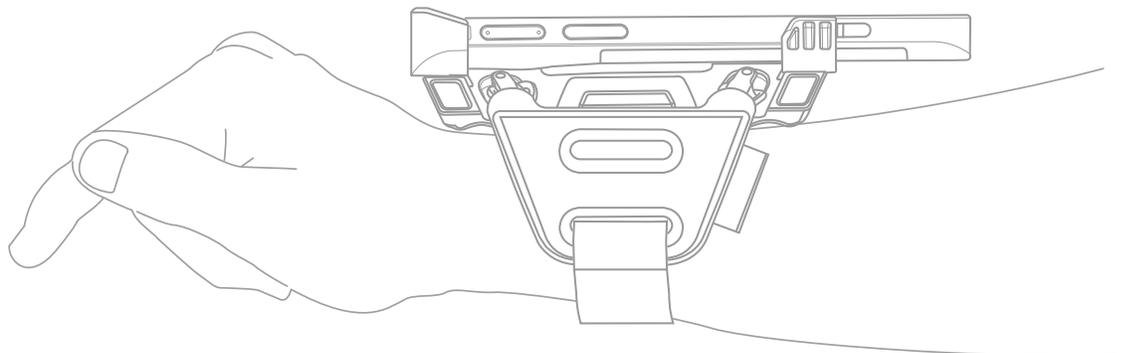


Scanning Barcodes

When a CT30 XP mobile computer has been installed in the wearable kit, it can be used to scan barcodes using either the CT30 XP's integrated imager or by pairing it with a Bluetooth scanner such as the 8675i Wearable Scanner.

For more information on scanning or pairing the CT30 XP mobile computer with a Bluetooth device, see the CT30 XP User Guide. For details on using a Bluetooth scanner, see the user guide for the selected device. Product documentation can be downloaded from sps.honeywell.com.

Remove Wearable Kit

1. To remove the Wearable Kit, loosen the strap. It is not necessary to remove the strap from the adjustment loop.
2. Remove the wearable kit from your arm.
3. Place the wearable kit on a table or other flat surface.
4. Push down on the clips on both sides of the sled to release the mobile computer and lift it out of the sled.

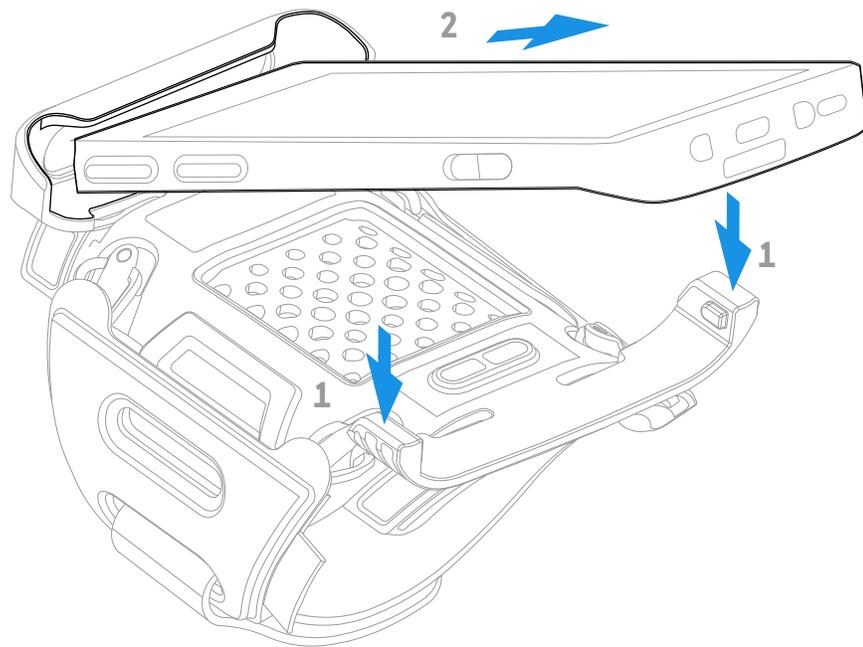


Replace Rubber Pad

The rubber pad on the Wearable Kit can be replaced if necessary due to wear or damage.

Note: *The rubber pad should always be used with the Wearable Kit to ensure that the kit stays in place on your arm.*

1. Remove the existing pad by sliding off the middle flaps then removing the front and back ends.
2. Insert the sled's rear feet into the rear slots on the new pad.

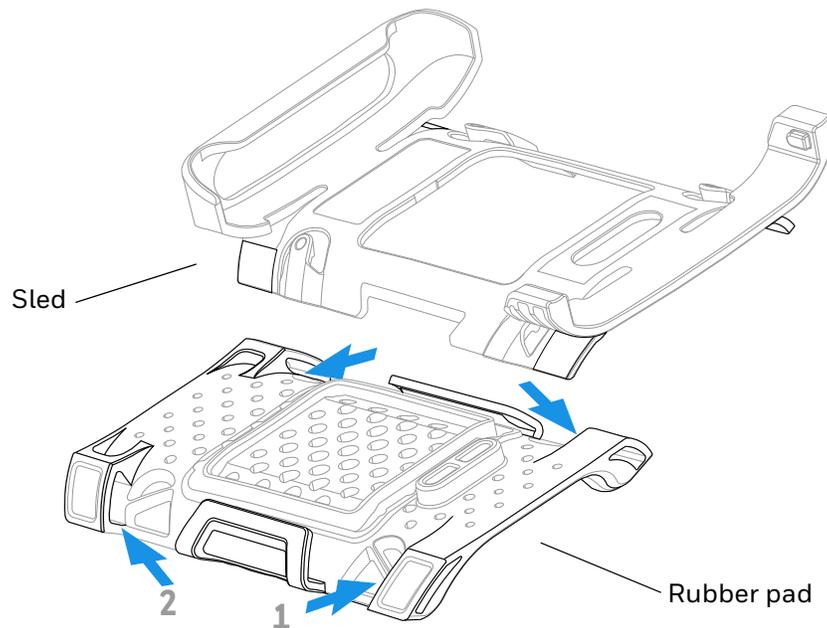

3. Insert the sled's front feet into the front slots on the pad.
4. Fold the middle flaps over the sled.

Cleaning

All parts of the Wearable Kit can be cleaned between uses. The armband and rubber pad can be cleaned with a non-abrasive, damp cloth and a mild dish soap solution.

The sled is made from the same disinfectant-ready housing (DRH) as the CT30 XP mobile computer and is designed to resist the effects of harsh chemicals. You can wipe off the sled between uses or as needed.

Please refer to the Honeywell Safety and Productivity Solutions website for specific details on how to clean disinfectant-ready housings. Helpful information on the care of these specialty products can be found in the following article:

- [Honeywell Instructions for Cleaning General Purpose Disinfectant-Ready Housing Devices](#)

Allow all parts to air dry completely before use.

MOUNT A CHARGING DOCK

Mount a Charging Dock


You can mount CT30 XP charge docks and the Quad Bay Battery Charger on a flat, horizontal surface such as a desktop or workbench with an optional DIN rail.

Mounting hardware required:


- DIN rail
- 3/16-inch diameter x 5/8-inch long pan head screw
- 1/2-inch OD x 7/32-inch ID x 3/64-inch thick washer
- 3/16-inch diameter nut

Note: A Charge Base is shown in the instructions below for illustration purposes. The mounting steps are the same for all CT30 XP docks and chargers.

1. Slide the DIN rail into the slot on the bottom.

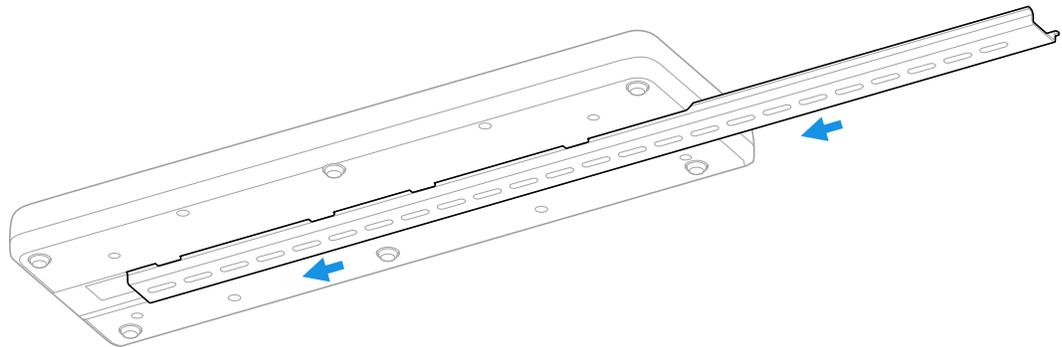

2. Secure the DIN rail to the flat surface with the hardware.

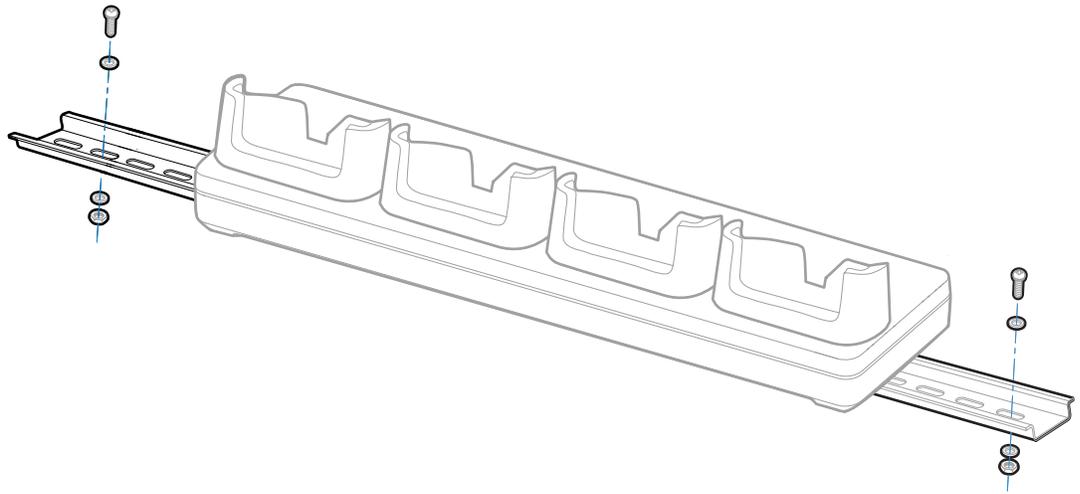

Note: Charging cup appearance may differ depending on model.

Honeywell
855 S. Mint Street
Charlotte, NC 28202

sps.honeywell.com